

# COVE 200


## RGBWW



CE RoHS

Notice: because the policy of improve the products quality of our company. Maybe some data in the instructions will change in future. By that time, we won't inform you about the changed matters. Our reserve the right of changing correlative specification when improve the products. Publisher of the instruction will not responsible for veracity of information and some correlative results caused by this information.

# 1.The Introduction of LED display panel

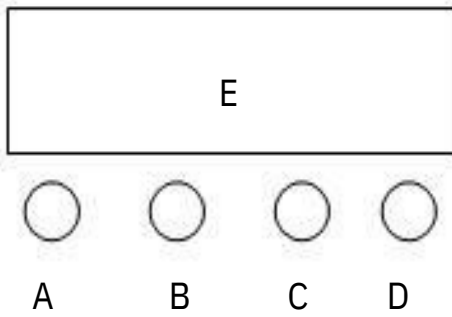

- A.Menu
- B.Up
- C. Down
- D.Enter
- E.LED display

Operation instruction: press “menu” to choose different effects, press “up” or “down” to set the function , press “enter” to confirm and save.

## 2. LED Menu:

No.	Menu	Description
1	A001	8CH dmx address,(001–512) B,C to set the value
2	d001	4CH dmx address,(001–512) B,C to set the value
3	CC00	Color Jump(01–99) B,C to set the value
4	CP00	Color Fade,(01–99) B,C to set the value
5	dE00	Color Pulse,(01–99) B,C to set the value
6	bEb1	Sound (Color Jump)
7	R255	R,(000–255) B,C to set the value
8	G255	G,(000–255) B,C to set the value
9	B255	B,(000–255) B,C to set the value
10	W255	W,(000–255) B,C to set the value

## 3. DMX512 CH 8CH (A001)

CH	Function	Description
1	Master dimmer	R,G,B,W master dimmer, 0~100%
2	Strobe	R,G,B,W master strobe, slow-fast
3	Macro	0—50: DMX ; 51 — 100:Color Jump; 101—150:Color fade; 151—200:Color Pulse; 201—255:Sound
4	Macro speed	Slow-fast
5	R	R dimmer,0~100%
6	G	G dimmer,0~100%

7	B	B dimmer,0~100%
8	W	W dimmer,0~100%

#### 4. DMX512 4CH (d001)

CH	Function	Description
1	R	R dimmer,0~100%
2	G	G dimmer,0~100%
3	B	B dimmer,0~100%
4	W	W dimmer,0~100%

#### 5. Feature :

Easy operate, flicker free.

#### 6.Parameter:

Voltage:AC100~-240V/50-60HZ Lamp specification: 1PCS 200W RGBW 4IN1 LED  
 DMX512 channel:4/8CH Control system:DMX512,sound,auto model/master and  
 slave Color effects: Color changing, strobe,Dimming 0-100%, fade,speed  
 adjustment,etc. Housing material: Aluminum ally Housing color: black Size:  
 240\*295\*315mm N.W:5.0KG Certification: CE, RoHS